


AT 520 ALUMINIUM-FRONT DOOR



CHARACTERISTICS

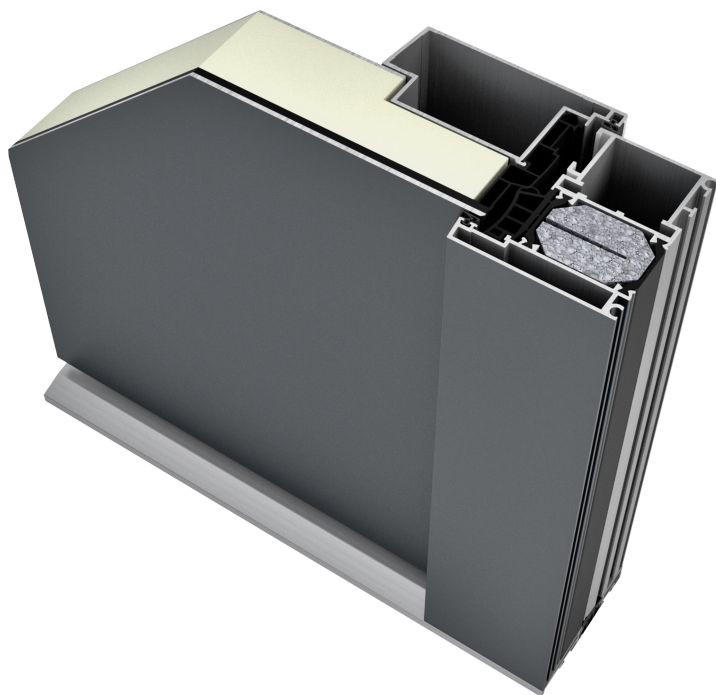

Thermal insulation (in W/m²K)
U_D up to 0,80



Sound reduction (in dB)
up to 32



Security
up to RC2






Locking
Multi-locking



Profile depth (in mm)
93

I-tec Open




The design comprises a square edged design with a flush door sash on the outside and profiled detail on the inside. The insulating foam core ensures excellent climatic stability. Easy care and cleaning thanks to smooth sash rebate. Standard 5-point locking provides maximum security.


ALUMINIUM-FRONT DOOR
AT 520

Cuts

Schnitt unten / Section - bottom

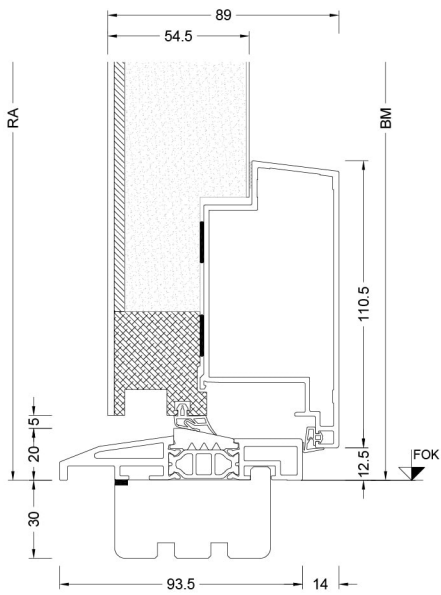

Schnitt seitlich, oben / Section - side top

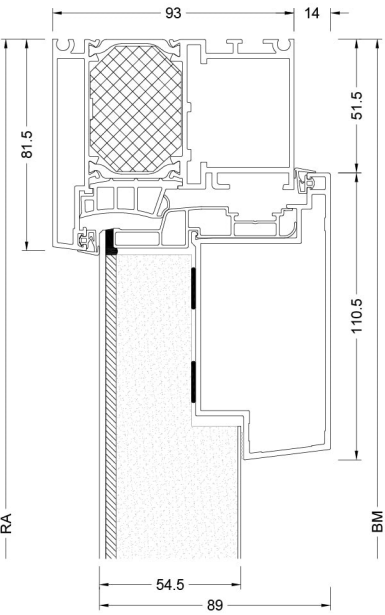

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size