home soft

Internorm
Windows – Doors

KF 410 UPVC-WINDOW

CHARACTERISTICS

Thermal insulation (in W/m²K)
U_w up to 0,62

Sound reduction (in dB)
up to 34 - 47

Security
up to RC 2

Locking
fully concealed

Installation Depth (in mm)
90

I-tec Glazing
I-tec Insulation
I-tec Decor





White uPVC windows are the classics in the home soft design style. Thanks to the I-tec Insulation technology, the frame is insulated all round and thermal insulation is significantly improved. The new I-tec Decor digital printing technology provides you with a wide range of designs to customise n the inside. Also available as a uPVC-aluminium window.

UPVC-WINDOW
KF 410

home soft

Cuts

Senkrecht / Vertical

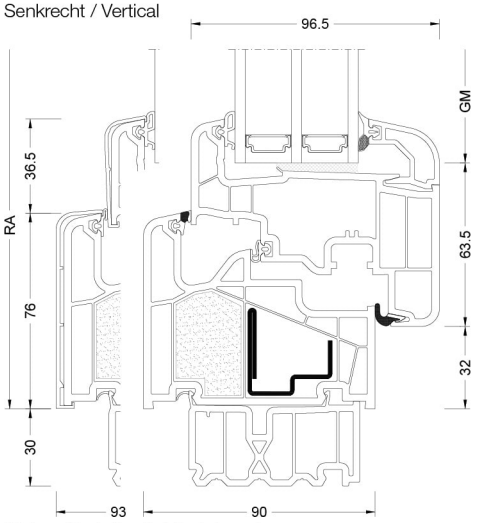

Waagrecht / Horizontal

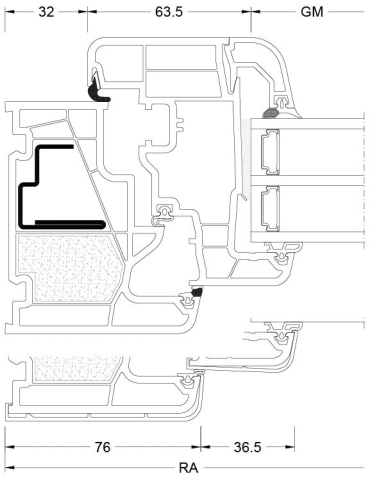

Stulp / Flying mullion

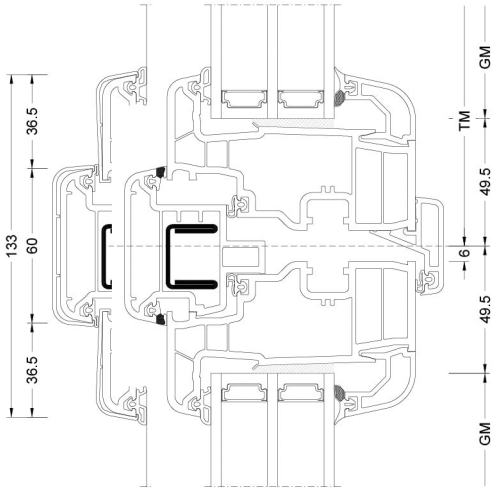

BM	Bestellmaß / Ordering size
FM G	Flügelmaß Gehflügel / Sash size master sash
FM S	Flügelmaß Stehflügel / Sash size slave sash
FOK	Fußbodenoberkante / Finished floor level
GM	Glasmaß / Glass size
RA	Rahmenaußenmaß / Outside frame size
TM	Teilungsmaß / Division size

InterHaus
PREMIUM WINDOWS AND DOORS

InterHaus Inc
L6K 2E8 Oakville
Speers Road 217
01 888 770 4917

interhaus.ca

UPVC-WINDOW
KF 410

home soft

Values

Glass Build Up	GC	Coating	AH	U_g	g	U_f	Psi	U_w	R_w	C	Ctr	Certificate - Thermal Performance	Certificate - Sound
4b/18Ar/4/18Ar/b4	3N2	Low-Carbon iplus	Iso Alu	0,5 0,5	53 53	0,92 0,92	0,033 0,073	0,71 0,81	34 34	-2 -2	-6 -6	✓ ✓	✓ ✓
6b/18Ar/4/16Ar/b4	33U	Low-Carbon iplus	Iso Alu	0,5 0,5	52 52	0,92 0,92	0,033 0,073	0,71 0,81	40 40	-2 -2	-6 -6	✓ ✓	✓ ✓
4b/16Ar/4/15Ar/ b44.2(VSG-S)	34N	Low-Carbon iplus	Iso Alu	0,6 0,6	52 52	0,92 0,92	0,033 0,073	0,78 0,88	42 42	-3 -3	-8 -8	✓ ✓	✓ ✓
6b/15Ar/4/14Ar/ b44.2(VSG-S)	34P	Low-Carbon iplus	Iso Alu	0,6 0,6	51 51	0,92 0,92	0,033 0,073	0,78 0,88	43 43	-2 -2	-6 -6	✓ ✓	✓ ✓
44b.2(VSG-S)/18Ar/4/16Ar/ b44.2(VSG-S)	3ND	Low-Carbon iplus	Iso Alu	0,5 0,5	47 47	0,92 0,92	0,033 0,073	0,71 0,81	47 47	-1 -1	-4 -4	✓ ✓	✓ ✓
44b.2(VSG-S)/15Ar/4/12Ar/b44.2(VSG-S)	3FH	Low-Carbon iplus	Iso Alu	0,6 0,6	47 47	0,92 0,92	0,033 0,073	0,78 0,88	45 45	-1 -1	-5 -5	✓ ✓	✓ ✓

Without Foam insert

Glass Build Up	GC	Coating	AH	U_g	g	U_f	Psi	U_w	R_w	C	Ctr	Certificate - Thermal Performance	Certificate - Sound
4b/18Ar/4/18Ar/b4	3N2	Low-Carbon iplus	Iso Alu	0,5 0,5	53 53	1,1 1,1	0,033 0,073	0,77 0,87	34 34	-2 -2	-6 -6	✓ ✓	× ×
6b/18Ar/4/16Ar/b4	33U	Low-Carbon iplus	Iso Alu	0,5 0,5	52 52	1,1 1,1	0,033 0,073	0,77 0,87	40 40	-2 -2	-6 -6	✓ ✓	× ×
4b/16Ar/4/15Ar/ b44.2(VSG-S)	34N	Low-Carbon iplus	Iso Alu	0,6 0,6	52 52	1,1 1,1	0,033 0,073	0,84 0,93	42 42	-3 -3	-8 -8	✓ ✓	× ×
6b/15Ar/4/14Ar/b44.2(VSG-S)	34P	Low-Carbon iplus	Iso Alu	0,6 0,6	51 51	1,1 1,1	0,033 0,073	0,84 0,93	43 43	-2 -2	-6 -6	✓ ✓	× ×
44b.2(VSG-S)/18Ar/4/16Ar/ b44.2(VSG-S)	3ND	Low-Carbon iplus	Iso Alu	0,5 0,5	47 47	1,1 1,1	0,033 0,073	0,77 0,87	47 47	-1 -1	-4 -4	✓ ✓	× ×
44b.2(VSG-S)/15Ar/4/12Ar/b44.2(VSG-S)	3FH	Low-Carbon iplus	Iso Alu	0,6 0,6	47 47	1,1 1,1	0,033 0,073	0,84 0,93	45 45	-1 -1	-5 -5	✓ ✓	✓ ✓

Insulating Foam Corner

Glass Build Up	GC	Coating	AH	U_g	g	U_f	Psi	U_w	R_w	C	Ctr	Certificate - Thermal Performance	Certificate - Sound
4b/18Ar/4/18Ar/b4	3N2	Low-Carbon iplus	Iso Alu	0,5 0,5	53 53	0,85 0,85	0,033 0,073	0,69 0,79	34 34	-2 -2	-6 -6	✓ ✓	× ×
6b/18Ar/4/16Ar/b4	33U	Low-Carbon iplus	Iso Alu	0,5 0,5	52 52	0,85 0,85	0,033 0,073	0,69 0,79	40 40	-2 -2	-6 -6	✓ ✓	× ×
4b/16Ar/4/15Ar/ b44.2(VSG-S)	34N	Low-Carbon iplus	Iso Alu	0,6 0,6	52 52	0,85 0,85	0,033 0,073	0,76 0,86	42 42	-3 -3	-8 -8	✓ ✓	× ×
6b/15Ar/4/14Ar/b44.2(VSG-S)	34P	Low-Carbon iplus	Iso Alu	0,6 0,6	51 51	0,85 0,85	0,033 0,073	0,76 0,86	43 43	-2 -2	-6 -6	✓ ✓	× ×
44b.2(VSG-S)/18Ar/4/16Ar/b44.2(VSG-S)	3ND	Low-Carbon iplus	Iso Alu	0,5 0,5	47 47	0,85 0,85	0,033 0,073	0,69 0,79	47 47	-1 -1	-4 -4	✓ ✓	× ×

InterHaus
PREMIUM WINDOWS AND DOORS

InterHaus Inc
L6K 2E8 Oakville
Speers Road 217
01 888 770 4917

interhaus.ca

UPVC-WINDOW
KF 410

home soft

Glass Build Up	GC	Coating	AH	U_g	g	U_f	Psi	U_w	R_w	C	Ctr	Certificate - Thermal Performance	Certificate - Sound
44b.2(VSG-S)/15Ar/4/12Ar/b44.2(VSG-S)	3FH	Low-Carbon iplus	Iso Alu	0,6 0,6	47 47	0,85 0,85	0,033 0,073	0,76 0,86	45 45	-1 -1	-5 -5	✓ ✓	✓ ✓

Internorm takes responsibility for the environment and climate

Internorm's use of low-carbon iplus glass saves 10,000 t of CO_2 eq annually

Glass is an fundamental component in window production. As Europe's leading window brand, we take our responsibility seriously, and incorporate low-carbon iplus insulating glazing in our product range as standard.

In order to reduce greenhouse gas emissions, we analysed the entire low-carbon float glass production chain. This included activities before, during and after the actual manufacturing process, right through to delivery to the customer.

The result is a 4 mm thick, low-carbon float glass with a reduced carbon footprint of 5.5 kg CO_2 eq/m^2 that delivers emission savings of over 45%.

What turns low-carbon iplus glass into thermally insulated glass?

- Use of low-emission raw materials
- Use of highly efficient melting furnaces including electric boosting
- At least 50% recycled content, to conserve valuable raw materials
- Utilisation of renewable energies
- Optimised transport throughout the entire supply chain