

HS 330 timber/aluminium lift-sliding door



PROPERTIES

Thermal insulation U_w as low as 0.73 W/(m²K)

Sound reduction up to 40 dB

Security RC1N, RC2

I-tec Glazing



Experience HS 330 interactively now







HS 330


Coordinate your living area harmoniously, because matching the timber/aluminium window HF 410, we also offer the same timber surfaces and colours for this lift-sliding door. This makes it easy for you to design your personal and harmonious living environment. A glass-fibre low threshold in the passing area which is covered with anodised aluminium on the outside, ensures optimum thermal insulation and stability. The fixed element which can be rendered into the brickwork on three sides, offers full glass appearance.




NEW Comfort Drive - the electric drive for convenient opening and closing of your lift-sliding door.

Internorm

Sections

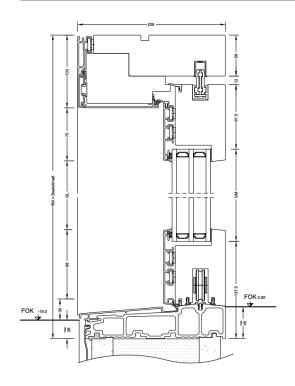


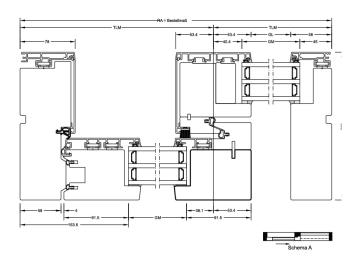



Designs/technical information


- · Scheme A: sash/fixed glazing
- · Scheme C: fixed glazing/sash/sash/fixed glazing
- · Scheme G: fixed glazing/sash/fixed glazing
- · Fixed elements HS330-30
- · All-glass corners

- · Profiling is the same all round
- Inside: all RAL colours; timber types spruce, larch, oak, ash, walnut (Internorm timber colour range).
 I-tec Core buildup is used with timber types oak, ash and walnut.
- · Aluminium outside: anodised, RAL, highly weatherresistant structure, metallic and timber decor colours









Unit 17, 217 Speers rd., Oakville, ON L6K 2E8

Internorm by InterHaus

Tel.: +1 437 770 1512

Email: info@interhaus.ca

3/2020

TIMBER/ALUMINIUM LIFT-SLIDING DOOR

HS 330



Values

Glass buildup	gC	Spacer	Coating	Ug	g	Uf	Psi	Uw	Thermal certif.	Ä.	ပ	Ctr	Sound certif.
4bESG/18Ar/4/18Ar/b4ESG	3T6	Iso	ECLAZ	0.5	59%	1.47	0.039	0.73*	NO	32	-1	-4	YES
4bESG/18Ar/4ESG/ 18Ar/b4ESG	3N3	Iso	ECLAZ	0.5	59%	1.47	0.039	0.73*	NO	33*	-	-	NO
6bESG/18Ar/6ESG /18Ar/b6ESG	3FD	Iso	ECLAZ	0.5	57%	1.47	0.039	0.73	YES	35	-2	-5	YES
6bESG/16Ar/b6ESG	2UF	Alu	ECLAZ	1.1	69%	1.57	0.077	1.3	YES	33	-1	-4	YES
		Iso	ECLAZ	1.1	69%	1.57	0.044	1.3	YES	33	-	-	NO
8bESG/16Ar/6ESG/ 18Ar/b6ESG	3FG	Iso	ECLAZ	0.5	56%	1.47	0.039	0.73*	NO	38	-2	-5	YES
6b/16Ar/5/18Ar/b44.2(VSG-S)	3F8	Iso	ECLAZ	0.5	58%	1.47	0.039	0.73*	NO	40	-2	-6	YES

Values for home pure with test certificate

ECLAZ®

Daylight is crucial for our human organism, our wellbeing and our health. Therefore, Internorm windows are equipped with premium glass coating ECLAZ® as standard. The blue components of the light spectrum are transported through the glass more and ensure up to 10 % more daylight. Compared to conventional market glazing, ECLAZ® is offering:

More aesthetics – colour-neutral outside view, a combination of

function and aesthetics

up to 10% more daylight – better for health More light -

and wellbeing - a significant advantage especially in the dark winter months*

Visual comfort for a brilliant view to the outside Room comfort makes living areas even lighter and friendlier

Energy efficiency – excellent insulation of interior thus reducing heating costs - increased energy efficiency in building - up to 11 % less CO2 emissions

^{*} In direct comparison to same glass buildups.



Internorm by InterHaus

Unit 17, 217 Speers rd., Oakville, ON L6K 2E8

Tel.: +1 437 770 1512

Email: info@interhaus.ca

3/2020