


AT 500 ALUMINIUM-FRONT DOOR



CHARACTERISTICS

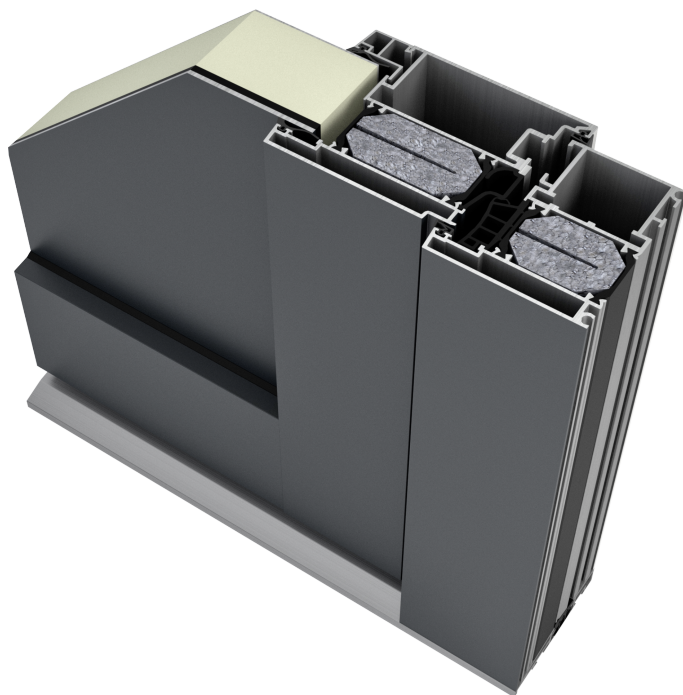

Thermal insulation (in W/m²K)
U_D up to 0,87



Sound reduction (in dB)
up to 40



Security
up to RC3






Locking
Multi-locking



Profile depth (in mm)
93

I-tec Open




This system is characterised internally and externally by a profiled design and clean, square shapes. Different design options provide countless design possibilities. Security options offer outstanding burglary protection up to RC 3.


ALUMINIUM-FRONT DOOR
AT 500

Cuts

Schnitt unten / Section - bottom

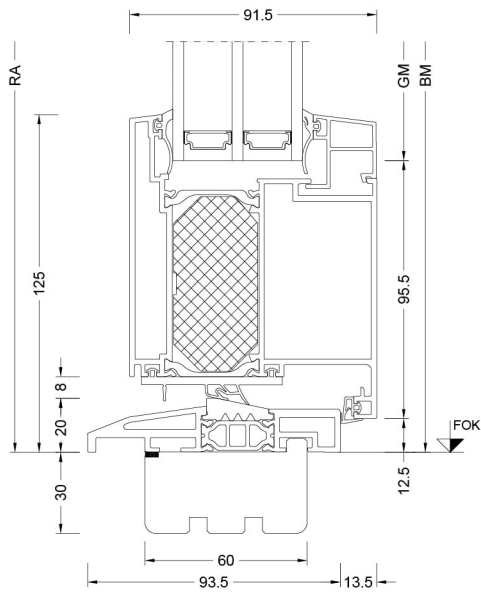

Schnitt seitlich, oben / Section - side top

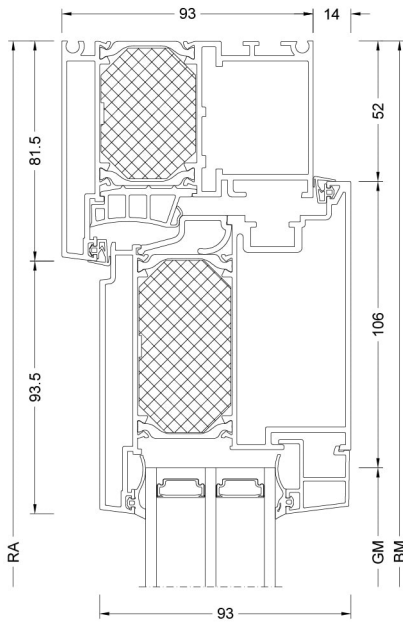

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size