

AT 530 ALUMINIUM-FRONT DOOR



CHARACTERISTICS



Thermal insulation (in W/m²K)
U_D up to 0,69



Sound reduction (in dB)
up to 34



Security
up to RC2






Locking
Multi-locking



Profile depth (in mm)
93

I-tec Open




The design of the entire door sash is flush with a square edge towards the frame both inside and outside. 3-chamber frame profile with insulating foam core provides maximum thermal insulation. A wide range of options and customised designs are available. Standard 5-point locking provides maximum security.


ALUMINIUM-FRONT DOOR
AT 530

Cuts

Schnitt unten / Section - bottom

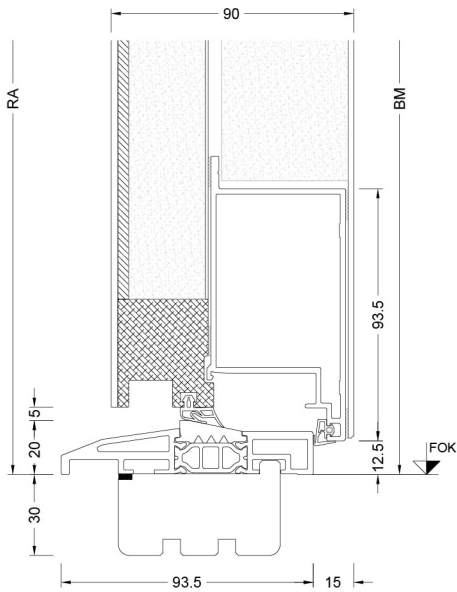

Schnitt seitlich, oben / Section - side top

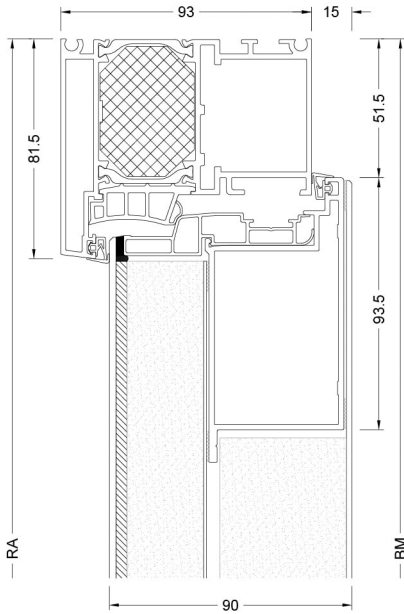

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size