

AT 540 ALUMINIUM-FRONT DOOR



CHARACTERISTICS



Thermal insulation (in W/m²K)
U_D up to 0,75



Sound reduction (in dB)
up to 35



Security
up to RC2






Locking
Multi-locking



Profile depth (in mm)
93

I-tec Open




The design of this door is completely flush both inside and outside, making it perfectly suited to modern and unique architecture.

The concealed door hinge is integrated as standard. The two chambers with insulated foam core ensure excellent climatic stability. Standard 5-point locking provides maximum security.


ALUMINIUM-FRONT DOOR
AT 540

Cuts

Schnitt unten / Section - bottom

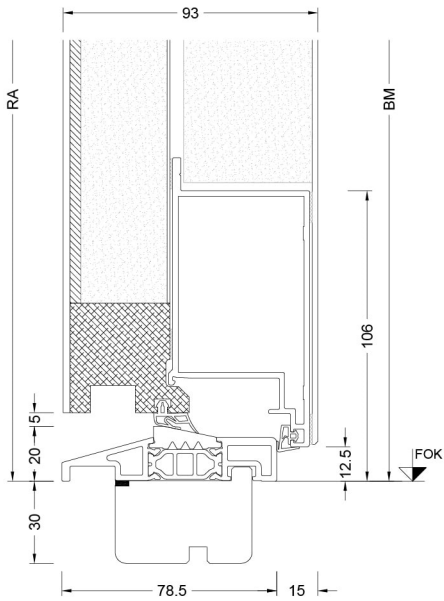

Schnitt seitlich, oben / Section - side top

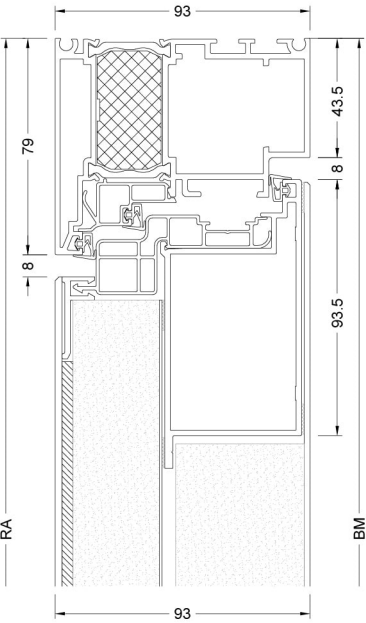

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size