


HT 410

TIMBER-ALUMINIUM-FRONT DOOR



CHARACTERISTICS

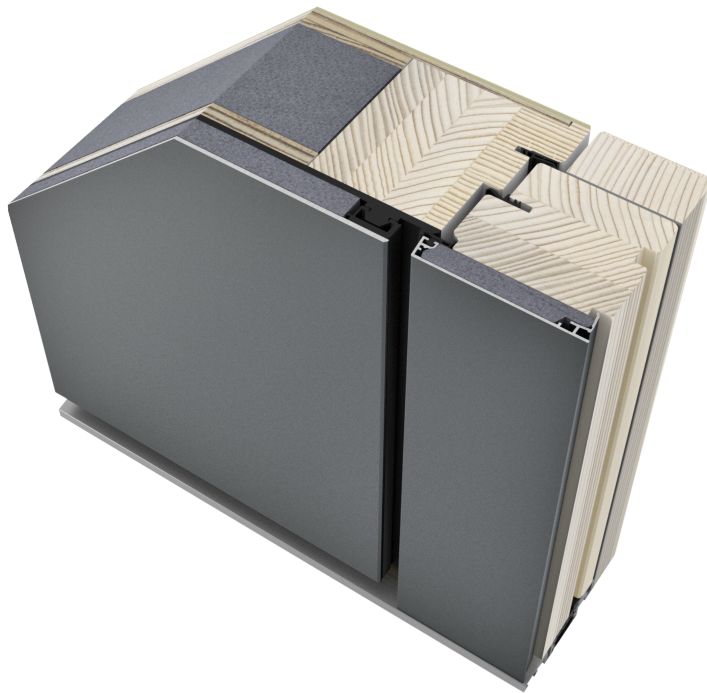

Thermal insulation (in W/m²K)
U_D up to 0,55



Sound reduction (in dB)
up to 34






Security
up to RC2



Locking
Multi-locking



Profile depth (in mm)
121

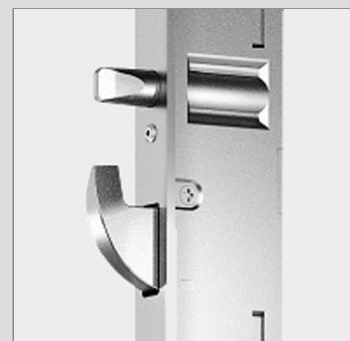


The design of this door is flush both inside and outside, making it perfectly suited to modern and unique architecture. The concealed door hinge is integrated as standard. Timber aluminium and highly insulating thermal foam insulation deliver an outstanding composite door solution. Standard 5-point locking provides maximum security.

TIMBER-ALUMINIUM-FRONT DOOR


HT 410

Cuts

Schnitt unten / Section - bottom

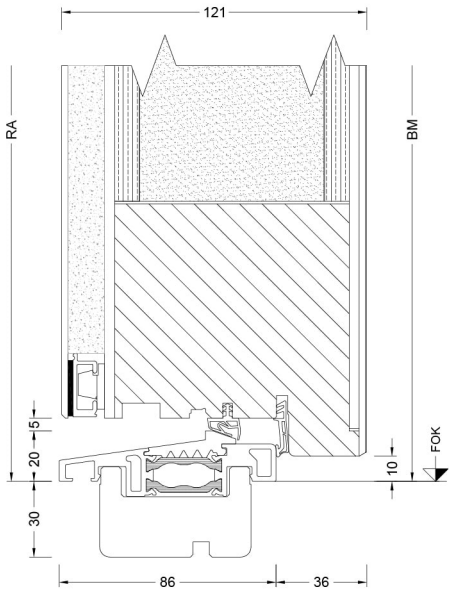

Schnitt seitlich, oben / Section - side top

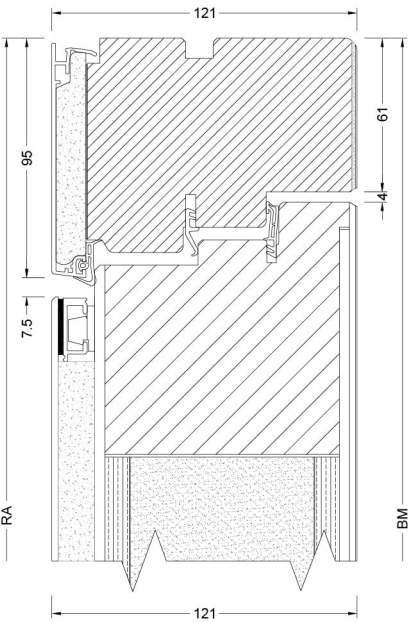

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size